



# RainBloc® For Mortar

Reduces or Eliminates Rain  
Water Penetration In  
Job-Site Mixed Mortar

Non-Chloride · Non Corrosive

Contents: 18.93 L (5 Gal. U.S.)

**Protect From Freezing**

**STORE ABOVE 40°F**

RainBloc® for Mortar from ACM Chemistries is a Polymeric job-site added mortar admixture which reduces or eliminates rain water penetration through mortar without adversely affecting other properties such as bond strength and board life. When used with certified water repellent concrete block made with ACM Chemistries' RainBloc® admixture, excellent water penetration resistance for the entire masonry system can be obtained. RainBloc® for Mortar also provides excellent rain water penetration resistance in mortar used in brick masonry construction.

RainBloc® for Mortar can be used in portland cement/lime or masonry cement mortars and is compatible with most other job site added mortar additives.

## DIRECTIONS FOR USE


Add RainBloc® for Mortar and allow the mortar to mix for at least 30 seconds before adding the final water.

Note: RainBloc® for Mortar may reduce the amount of final water normally used. It is recommended to add half the amount of final water normally used and slowly add the remaining final water until desired consistency is achieved.

Mix for an additional (5) minutes after completing the final water addition to ensure well mixed.

## ADDITION RATE

	DOSAGE
Portland/Lime	1.0 QT/bag of Portland cement (lime not included)
Pre-Blended Portland/Lime	1.0 QT/bag of pre-blend
Masonry Cement	0.5 QT/bag of masonry cement
Pre-blended Bulk Mortar	0.5 QT/3 cu.ft. of mortar produced

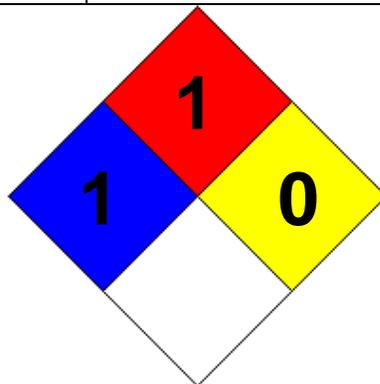

**WARNING! CAUSES IRRITATION. MAY BE HARMFUL IF SWALLOWED**

## PRECAUTIONARY MEASURES:

- Avoid contact with skin, eyes, and clothing
- Wash thoroughly after handling
- Avoid breathing vapors or spray mist
- Use with adequate ventilation
- Keep container closed when not in use
- FOR PROFESSIONAL USE ONLY.
- KEEP OUT OF CHILDREN'S REACH

## FIRST AID:

**EYE:** In case of contact, immediately flush with plenty of water for at least 15 minutes holding eyelids apart. See a physician.

**SKIN:** Immediately wash area with soap and water. If irritation develops, consult a physician. Remove contaminated clothing and wash before reuse.

**INHALATION:** If inhaled, remove to fresh air. If not breathing give artificial respiration. If breathing is difficult give oxygen. Get medical attention immediately.

**INGESTION:** If swallowed, induce vomiting as directed by medical personnel. Never give anything by mouth to an unconscious person. Get medical attention immediately.

RainBloc® for Mortar should not be added to mortar if outside temperatures are below 34°F. Product must be stored at temperatures above 40°F. **PROTECT FROM FREEZING.**

**Shelf life: 1 year**

**ACM Chemistries, Inc.**  
P. O. Box 920430  
Norcross, GA 30010  
(770) 417-3490